



Basic Electric

ISO9001:2015    

Basic Electric Industrial Co.,Ltd.

Head Office: 2Fl., No. 347, Sec.3 Bei Shen Road,
Shen Keng, Taipei 222 Taiwan, R.O.C.
Phone: (886) 2-2662-3638 Fax: (886) 2-2662-0698
E-mail: basic.eletric@msa.hinet.net

www.basic-electric.com.tw

ISO9001:2015    

China Factory: NO. 12 ADLO Road,Jun'an Town, Shunde District,
Foshan City, Guangdong, China.
Tel: +86-757-25511798 Fax: +86-757-25511797
Email: sales@basicelectric.com.tw

**BASIC ELECTRIC
INDUSTRIAL CO.,LTD.**

www.basic-electric.com.tw



www.basic-electric.com.tw

BASIC ELECTRIC INDUSTRIAL CO.,Ltd.

COMPANY PROFILE

Basic Electric Industrial Co., LTD. was founded in 1992. We are an experienced & professional manufacturer of Transformer, Fan Center, EC Motor as well as C-Frame Motor (shaded pole motor), which are applied to Auto control system for industrial, home appliances such as electric fans, air conditioners,refrigeration,kitchen ventilator, etc. We have passed ISO9001:2015 quality management standard and Over 4500 models of transformers and several series of motors have got UL recognized.

We market and sell our product through two brands: Basic Electric, Pan Globe. Our brands are very well known in the HVACR (Heating, Ventilation, Air Conditioning & Refrigeration Industrial) line. Besides having big market in USA, we sell to Brazil, Russia, Mid-East and all the distributors and manufacturers around the world. We can also do private label, where we can use your company's brand on the unit, gift-box and the cartons.

We are dedicated to improve in design, quality and customer service to provide high quality, innovative products at affordable prices with a wide range of customers.

Should you be interested in any of our products, please don't hesitate to contact us.





ENTERPRISE CULTURE


Practical/ Innovative/ Harmonious/
All-win in cooperation

CONTENTS

Class 2 Transformer	01-11
General Purpose Transformer	12-18
Auto Transformer	19-19
Industrial Control Transformer	20-20
Fan Control Center	21-21
EC Motor	22-24
C-Frame Motor	25-25
Square Shaded-Pole Motor	26-26

Class 2 Transformer

http://basicelectric.en.alibaba.com

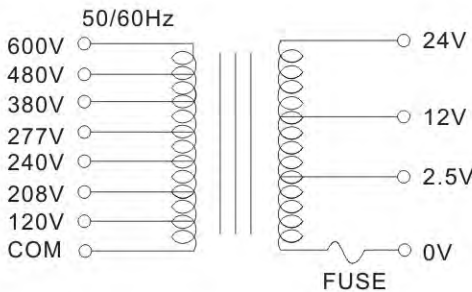

Main Features


- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
F Model		120V, 208V, 240V, 277V, 380V, 480V, 600V,			
		120/208V, 120/240V, 120/277V, 120/380V, 120/480V, 208/240V, 208/277V, 208/380V, 208/480V, 240/277V, 240/380V, 240/480V, 277/480V, 380/480V, 480/600V,			
	5VA				
	10VA				
	20VA				
	25VA	120/208/240V, 120/208/277V, 120/208/380V, 120/208/480V, 120/240/277V, 120/240/480V,	12V		
	30VA	208/240/277V, 208/240/380V, 208/240/480V,	24V		
	40VA	208/277/480V, 208/380/480V, 240/277/480V,	2.5/12V		
	50VA	240/380/480V,	2.5/24V	√	√
	60VA		12/24V		
	75VA	120/208/240/277V, 120/208/240/380V, 120/240/277/480V, 120/208/240/480V, 208/240/380/480V,	12/24V		
	96VA		2.5/12/24V		
		120/208/240/277/480V, 120/208/240/380/480V			
Recognized U.S. and Canada Conformance Européenne					

Class 2 Transformer

http://basicelectric.en.alibaba.com

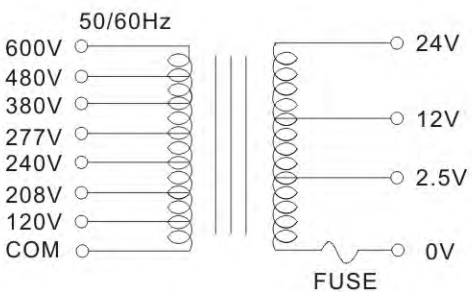

Main Features


- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
OF Model		120V, 208V, 240V, 277V, 380V, 480V, 600V,			
		120/208V, 120/240V, 120/277V, 120/380V,120/480V, 208/240V, 208/277V, 208/380V, 208/480V, 240/277V, 240/380V, 240/480V, 277/380V, 277/480V, 380/480V, 480/600V,			
	10VA				
	20VA				
	25VA	120/208/240V, 120/208/277V, 120/208/380V, 120/208/480V, 120/240/277V, 120/240/380V, 120/240/480V, 120/277/380V, 120/277/480V, 208/240/277V, 208/240/380V, 208/240/480V,	12V		
	30VA	208/277/480V, 208/380/480V, 240/277/380V, 240/277/480V, 240/380/480V, 277/380/480V,	24V		
	40VA		2.5/12V		
	50VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/380/480V, 240/277/380/480V,	2.5/24V	√	√
	75VA		12/24V		
	96VA		2.5/12/24V		
		120/208/240/277/380V, 120/208/240/277/480V, 120/208/240/380/480V, 120/240/277/380/480V, 208/240/277/380/480V,			
		120/208/240/277/380/480V			
Recognized U.S. and Canada Conformance Européenne					

Class 2 Transformer

http://basicelectric.en.alibaba.com

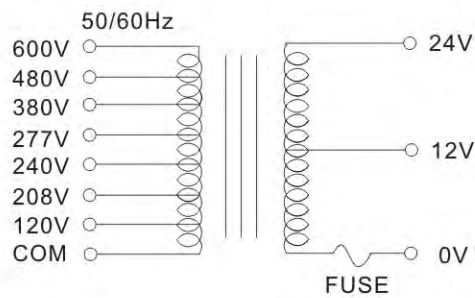

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
OFT Model	20VA	120V, 208V, 240V, 277V, 380V, 480V, 600V, 120/208V, 120/240V, 120/277V, 120/380V, 120/480V, 208/240V, 208/277V, 208/380V, 208/480V, 240/277V, 240/380V, 240/480V, 277/380V, 277/480V, 380/480V, 480/600V,	12V 24V 12/24V	✓	✓
	25VA	120/208/240V, 120/208/277V, 120/208/480V, 120/240/277V, 120/208/380V, 120/240/480V, 120/277/380V, 120/277/480V, 208/240/277V, 208/240/380V, 208/240/480V, 208/277/480V, 240/277/380V, 240/277/480V, 277/380/480V,			
	30VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
	40VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
	50VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
OFT Model	75VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,	12V 24V 12/24V	✓	✓
	96VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
		120/208/240/277/380V, 120/208/240/277/480V, 120/208/240/380/480V, 120/240/277/380/480V, 208/240/277/380/480V,			
		120/208/240/277/380/480V			
		120/208/240/277/380/480V			




Recognized U.S. and Canada



Conformite Europe

Class 2 Transformer

http://basicelectric.en.alibaba.com

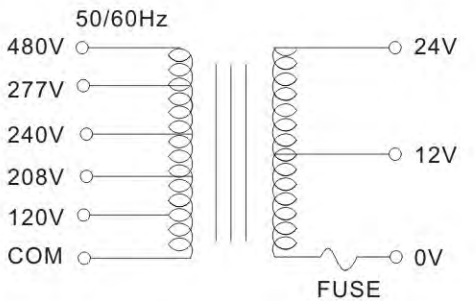

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
OFTL Model	20VA	120V, 208V, 240V, 277V, 380V, 480V, 600V, 120/208V, 120/240V, 120/277V, 120/380V, 120/480V, 208/240V, 208/277V, 208/380V, 208/480V, 240/277V, 240/380V, 240/480V, 277/380V, 277/480V, 380/480V, 480/600V,	12V 24V 12/24V	✓	✓
	25VA	120/208/240V, 120/208/277V, 120/208/480V, 120/240/277V, 120/208/380V, 120/208/480V, 120/240/277V, 120/240/380V, 120/240/480V, 120/277/380V, 120/277/480V, 208/240/277V, 208/240/380V, 208/240/480V, 208/277/480V, 240/277/380V, 240/277/480V, 277/380/480V,			
	30VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
	40VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
	50VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
OFTL Model	75VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,	12V 24V 12/24V	✓	✓
	96VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/240/277/480V, 208/240/277/380V, 208/240/277/480V,			
		120/208/240/277/380V, 120/208/240/277/480V, 120/208/240/380/480V, 120/240/277/380/480V, 208/240/277/380/480V,			
		120/208/240/277/380/480V			
		120/208/240/277/380/480V			




Recognized U.S. and Canada



Conformite Europe

Class 2 Transformer

http://basicelectric.en.alibaba.com

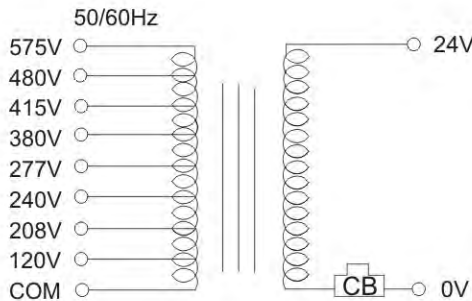

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount
- .UL5085, Class II transformer

Main Electric Parameters


Type	VA Rating	PRI	SEC		
OFC Model		120V, 208V, 240V, 277V, 380V, 415V, 480V, 575V, 120/208V, 120/240V, 120/277V, 120/380V, 120/415V, 120/480V, 120/575V, 208/240V, 208/277V, 208/380V, 208/415V, 208/480V, 208/575V, 240/277V, 240/380V, 240/415V, 240/480V, 240/575V, 277/480V, 277/575V, 380/415V, 380/480V, 415/480V, 480/575V, 120/208/240V, 120/208/277V, 120/208/380V, 120/208/415V, 120/208/480V, 120/208/575V, 120/240/277V, 120/240/380V, 120/240/415V, 120/240/480V, 120/240/575V, 120/277/480V, 120/277/575V, 120/380/415V, 120/380/480V, 120/415/480V, 208/240/277V, 208/240/380V, 208/240/415V, 208/240/480V, 208/240/575V, 208/380/415V, 208/380/480V, 208/415/480V, 240/277/480V, 240/277/575V, 240/380/415V, 240/380/480V, 240/415/480V, 277/480/575V, 380/415/480V, 120/208/240/277V, 120/208/240/380V, 120/208/240/415V, 120/208/240/480V, 120/208/240/575V, 120/208/277/480V, 120/240/277/480V, 120/240/277/575V, 120/240/380/415V, 120/240/380/480V, 120/240/415/480V, 120/380/415/480V, 208/240/277/480V, 208/240/277/575V, 208/240/380/415V, 208/240/380/480V, 208/240/415/480V, 240/277/480/575V, 240/380/415/480V, 120/208/240/277/480V, 120/208/240/277/575V, 120/208/240/380/415V, 120/208/240/380/480V, 120/208/240/415/480V, 120/240/380/415/480V, 208/240/380/415/480V, 208/240/277/480/575V, 120/208/240/277/480/575V, 120/208/240/380/415/480V	24V	✓	✓

 Recognized U.S. and Canada

 Conformance Européenne

Class 2 Transformer

http://basicelectric.en.alibaba.com

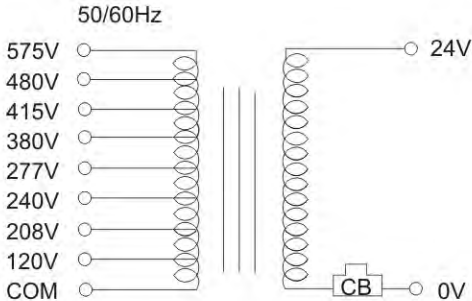

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC			
OFCT Model	50VA 75VA 96VA	120V, 208V, 240V, 277V, 380V, 415V, 480V, 575V, 120/208V, 120/240V, 120/277V, 120/380V, 120/415V, 120/480V, 120/575V, 208/240V, 208/277V, 208/380V, 208/415V, 208/480V, 208/575V, 240/277V, 240/380V, 240/415V, 240/480V, 240/575V, 277/480V, 277/575V, 380/415V, 380/480V, 415/480V, 480/575V, 120/208/240V, 120/208/277V, 120/208/380V, 120/208/415V, 120/208/480V, 120/208/575V, 120/240/277V, 120/240/380V, 120/240/415V, 120/240/480V, 120/240/575V, 120/277/480V, 120/277/575V, 120/380/415V, 120/380/480V, 120/415/480V, 208/240/277V, 208/240/380V, 208/240/415V, 208/240/480V, 208/240/575V, 208/415/480V, 240/277/480V, 240/380/415V, 240/380/480V, 240/277/575V, 240/415/480V, 277/480/575V, 380/415/480V 120/208/240/277V, 120/208/240/380V, 120/208/240/415V, 120/208/240/480V, 120/208/240/575V, 120/240/277/480V, 120/240/277/575V, 120/240/380/415V, 120/240/380/480V, 120/240/415/480V, 120/380/415/480V, 208/240/277/480V, 208/240/277/575V, 208/240/380/415V, 208/240/380/480V, 208/240/415/480V, 240/277/480/575V, 240/380/415/480V, 120/208/240/277/480V, 120/208/240/380/415V, 120/208/240/380/480V, 120/208/240/415/480V, 120/208/240/277/575V, 120/240/380/415/480V, 208/240/380/415/480V, 208/240/277/480/575V, 120/208/240/277/480/575V, 120/208/240/380/415/480V	24V	✓	✓	
 Recognized U.S. and Canada  Conformance Européenne						

Class 2 Transformer

http://basicelectric.en.alibaba.com



50/60Hz

575V
480V
415V
380V
277V
240V
208V
120V
COM

24V

0V

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
OFCTL Model	50VA 75VA 96VA	120V, 208V, 240V, 277V, 380V, 415V, 480V, 575V,	24V	✓	✓
		120/208V, 120/240V, 120/277V, 120/380V, 120/415V, 120/480V, 120/575V, 208/240V, 208/277V, 208/380V, 208/415V, 208/480V, 208/575V, 240/277V, 240/380V, 240/415V, 240/480V, 240/575V, 277/480V, 277/575V, 380/415V, 380/480V, 415/480V, 480/575V,			
		120/208/240V, 120/208/277V, 120/208/380V, 120/208/415V, 120/208/480V, 120/208/575V, 120/240/277V, 120/240/380V, 120/240/415V, 120/240/480V, 120/240/575V, 120/277/480V, 120/277/575V, 120/380/415V, 120/380/480V, 120/415/480V, 208/240/277V, 208/240/380V, 208/240/415V, 208/240/480V, 208/240/575V, 208/415/480V, 240/277/480V, 240/380/415V, 240/380/480V, 240/277/575V, 240/415/480V, 277/480/575V, 380/415/480V			
		120/208/240/277V, 120/208/240/380V, 120/208/240/415V, 120/208/240/480V, 120/208/240/575V, 120/240/277/480V, 120/240/277/575V, 120/240/380/415V, 120/240/380/480V, 120/240/415/480V, 120/380/415/480V, 208/240/277/480V, 208/240/277/575V, 208/240/380/415V, 208/240/380/480V, 208/240/415/480V, 240/277/480/575V, 240/380/415/480V,			
		120/208/240/277/480V, 120/208/240/380/415V, 120/208/240/380/480V, 120/208/240/415/480V, 120/208/240/277/575V, 120/240/380/415/480V, 208/240/380/415/480V, 208/240/277/480/575V,			
		120/208/240/277/480/575V, 120/208/240/380/415/480V			
 Recognized U.S. and Canada  Conformance Européenne					

Class 2 Transformer

http://basicelectric.en.alibaba.com



50/60Hz

120V
COM

10V
0V

FUSE

50/60Hz

120V
COM

16V
0V

FUSE

50/60Hz

480V
277V
240V
208V
120V
24V
COM

24V
12V
2.5V
0V

FUSE

Main Features


- 50/60Hz
- 130(B) insulation system
- Foot Mount or Hub Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
MW / MT Model		24V, 120V, 208V, 240V, 277V, 480V,		✓	✓
		120/208V, 120/240V, 120/277V, 120/480V, 208/240V,			
	5VA	208/277V, 208/480V, 240/277V, 240/480V, 277/480V,	10V		
	10VA		12V		
	15VA	120/208/240V, 120/208/277V, 120/208/480V,	16V		
	20VA	120/240/277V, 120/240/480V, 120/277/480V,	24V		
	25VA	208/240/277V, 208/240/480V, 208/277/480V,	2.5/12V		
	30VA	240/277/480V,	2.5/24V		
	40VA		12/24V		
	50VA	120/208/240/277V, 120/208/240/480V,	2.5/12/24V		
60VA	120/208/277/480V, 120/240/277/480V,				
75VA	208/240/277/480V,				
		120/208/240/277/480V			
 UL Listed for the US and Canada  Conformance Européenne					

Class 2 Transformer

http://basicelectric.en.alibaba.com

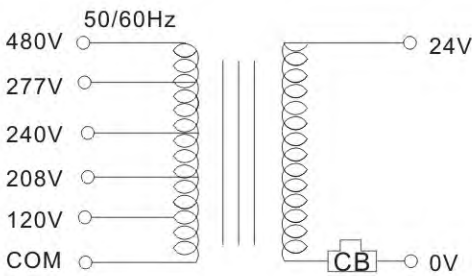

Main Features



- 50/60Hz
- 130(B) insulation system
- Plate Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC	UL LISTED	CE
PT/PW Model	40VA 50VA 96VA	120V, 208V, 240V, 277V, 480V,	24V	✓	✓
		120/208V, 120/240V, 120/277V, 120/480V, 208/240V, 208/277V, 208/480V, 240/277V, 240/480V, 277/480V,			
		240/277/480V, 120/208/240V, 120/208/277V, 120/208/480V, 120/240/277V, 120/240/480V, 120/277/480V, 208/240/277V, 208/240/480V, 208/277/480V,			
		120/208/240/277V, 120/208/240/480V, 120/208/277/480V, 120/240/277/480V, 208/240/277/480V,			
		120/208/240/277/480V			
UL LISTED UL Listed for the US and Canada CE Conformite Europende					


Class 2 Transformer

http://basicelectric.en.alibaba.com

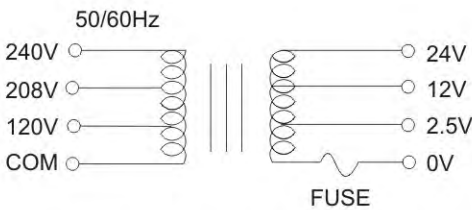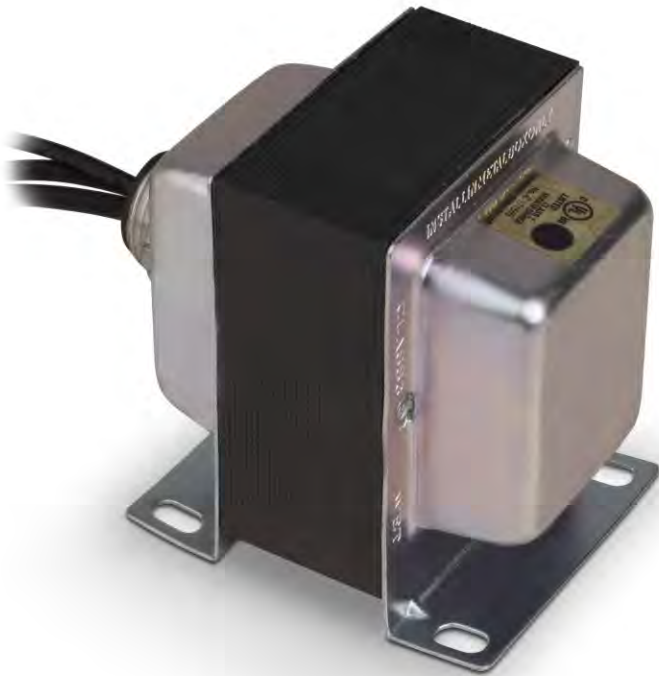

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount or Hub Mount
- UL5085, Class II transformer

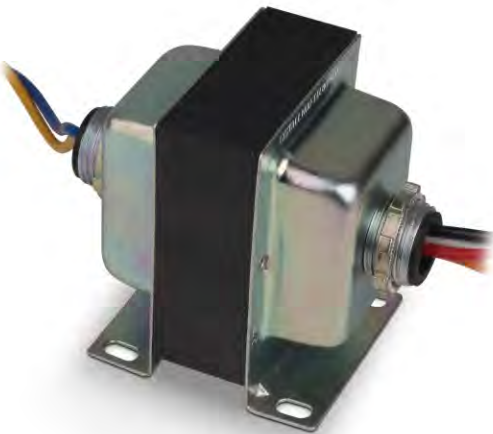


Main Electric Parameters

Type	VA Rating	PRI	SEC		
DH/SH Model	20VA 40VA 50VA	24V,120V, 208V, 240V	12V 24V	✓	✓
		120/208V, 120/240V, 208/240V	2.5/12V 2.5/24V		
		120/208/240V	12/24V		
			2.5/12/24V		
 UL Listed for the US and Canada  Conformance Européenne					

Class 2 Transformer

http://basicelectric.en.alibaba.com

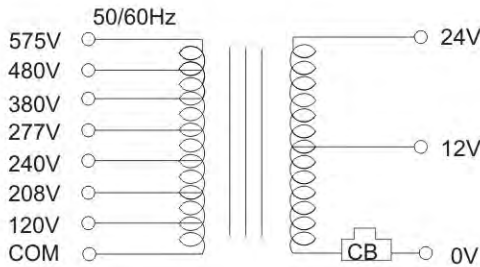

Main Features


- 50/60Hz
- 130(B) insulation system
- Foot Mount or Hub Mount
- UL5085, Class II transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
SH/DH CB Model		24V,120V, 208V, 240V, 277V, 380V, 480V, 575V			
		120/208V, 120/240V, 120/277V, 120/380V, 120/480V, 120/575V, 208/240V, 208/277V, 208/380V, 208/480V, 208/575V, 240/277V, 240/380V, 240/480V, 240/575V, 277/480V, 277/575V, 380/480V, 480/575V,			
		120/208/240V, 120/208/277V, 120/208/380V, 120/208/480V, 120/208/575V, 120/240/277V, 120/240/380V, 120/240/480V, 120/240/575V, 120/277/480V, 120/380/480V, 120/277/575V, 120/480/575V, 208/240/277V, 208/240/380V, 208/240/480V, 208/240/575V, 208/277/480V, 208/240/575V, 208/277/575V, 208/380/480V, 208/480/575V, 240/277/480V, 240/277/575V, 240/380/480V, 240/480/575V, 277/480/575V,			
	50VA 60VA 75VA 96VA	120/208/240/277V, 120/208/240/380V, 120/208/240/480V, 120/208/240/575V, 120/208/277/480V, 120/208/277/575V, 120/208/480/575V, 120/240/277/480V, 120/277/480/575V, 120/208/277/575V, 120/208/380/480V, 120/208/480/575V, 120/240/277/480V, 120/240/277/575V, 120/240/380/480V, 120/240/480/575V, 120/277/480/575V, 208/240/277/480V, 208/240/277/575V, 208/240/380/480V, 208/240/480/575V, 208/277/480/575V, 240/277/480/575V,	24V 12/24V	✓	✓
		120/208/240/277/480V, 120/208/240/277/575V, 120/208/240/380/480V, 120/208/240/277/575V, 120/240/277/480/575V, 208/240/277/575V, 208/240/380/480V, 208/240/480/575V,			
 UL Listed for the US and Canada  Conformance Européenne					

General Purpose Transformer

http://basicelectric.en.alibaba.com

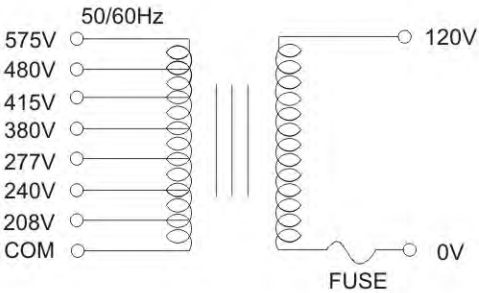

Main Features


- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL506, General Purpose Transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		
F Model		208V, 240V, 277V, 380V, 415V, 480V, 575V,			
		208/240V, 208/277V, 208/380V, 208/415V, 208/480V, 208/575V, 240/277V, 240/380V, 240/415V, 240/480V, 240/575V, 277/380V, 277/415V, 277/480V, 277/575V, 380/415V, 380/480V, 380/575V, 415/480V, 415/575V, 480/575V,			
		208/240/277V, 208/240/380V, 208/240/415V, 208/240/480V, 208/240/575V, 208/277/380V, 208/277/415V, 208/277/480V, 208/277/575V, 240/277/380V, 240/277/415V, 240/277/480V, 240/277/575V, 277/380/415V, 277/380/480V, 277/380/575V, 277/415/480V, 277/415/575V, 380/415/480V, 380/415/575V, 380/480/575V, 415/480/575V			
	15VA 20VA 25VA 30VA 40VA 50VA 60VA 75VA 96VA	208/240/277/380V, 208/240/277/415V, 208/240/277/480V, 208/240/277/575V, 240/277/380/480V, 240/277/380/415V, 240/277/380/575V, 277/380/415/480V, 277/380/415/575V, 277/380/480/575V,	120V	✓	✓
		208/240/277/380/415V, 208/240/277/380/480V, 208/240/277/380/575V, 240/277/380/415/480V, 240/277/380/415/575V, 240/277/380/480/575V, 277/380/415/480/575V,			
		208/240/277/380/415/480V, 208/240/277/380/480/575V, 240/277/380/415/480/575V,			
		208/240/277/380/415/480/575V,			
		208/240/277/380/415/480/575V,			
		208/240/277/380/415/480/575V,			
		208/240/277/380/415/480/575V			
 Recognized U.S. and Canada  Conformance Européenne					

General Purpose Transformer

http://basicelectric.en.alibaba.com

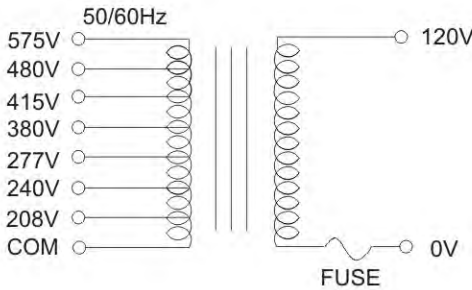

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL506, General Purpose Transformer


Main Electric Parameters

Type	VA Rating	PRI	SEC		
OF Model		208V, 240V, 277V, 380V, 415V, 480V, 575V, 208/240V, 208/277V, 208/380V, 208/415V, 208/480V, 208/575V, 240/277V, 240/380V, 240/415V, 240/480V, 240/575V, 277/380V, 277/415V, 277/480V, 277/575V, 380/415V, 380/480V, 380/575V, 415/480V, 415/575V, 480/575V, 208/240/277V, 208/240/380V, 208/240/415V, 208/240/480V, 208/240/575V, 208/277/380V, 208/277/415V, 208/277/480V, 208/277/575V, 240/277/380V, 240/277/415V, 240/277/480V, 240/277/575V, 277/380/415V, 277/380/480V, 277/380/575V, 277/415/480V, 277/415/575V, 380/480/575V, 380/415/480V, 380/415/575V, 415/480/575V, 208/240/277/380V, 208/240/277/415V, 208/240/277/480V, 208/240/277/575V, 240/277/380/415V, 240/277/380/480V, 240/277/380/575V, 277/380/415/480V, 277/380/415/575V, 277/380/480/575V, 277/415/480/575V, 380/415/480/575V, 208/240/277/380/415V, 208/240/277/380/480V, 208/240/277/380/575V, 240/277/380/415/480V, 240/277/380/415/575V, 240/277/380/480/575V, 277/380/415/480/575V, 208/240/277/380/415/480V, 208/240/277/380/480/575V, 240/277/380/415/480/575V, 208/240/277/380/415/480/575V	120V	✓	✓
	15VA				
	20VA				
	25VA				
	30VA				
	40VA				
	50VA				
	60VA				
	75VA				
	96VA				

Recognized U.S. and Canada Conformite Europe

General Purpose Transformer

http://basicelectric.en.alibaba.com

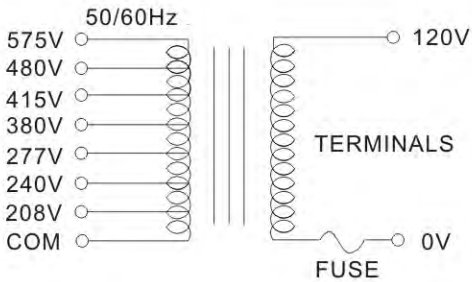

Main Features

- 50/60Hz
- 130(B) insulation system
- Foot Mount
- UL506, General Purpose Transformer




Main Electric Parameters

Type	VA Rating	PRI	SEC		
OFT Model		208V, 240V, 277V, 380V, 415V, 480V, 575V, 208/240V, 208/277V, 208/380V, 208/415V, 208/480V, 208/575V, 240/277V, 240/380V, 240/415V, 240/480V, 240/575V, 277/380V, 277/415V, 277/480V, 277/575V, 380/415V, 380/480V, 380/575V, 415/480V, 415/575V, 480/575V, 208/240/277V, 208/240/380V, 208/240/415V, 208/277/415V, 208/240/480V, 208/240/575V, 208/277/380V, 208/277/480V, 208/277/575V, 240/277/380V, 240/277/415V, 240/277/480V, 240/277/575V, 277/380/415V, 277/380/480V, 277/380/575V, 277/415/480V, 277/415/575V, 380/415/480V, 380/415/575V, 380/480/575V, 415/480/575V, 208/240/277/380V, 208/240/277/415V, 208/240/277/480V, 208/240/277/575V, 240/277/380/415V, 240/277/380/480V, 240/277/380/575V, 277/380/415/480V, 277/380/415/575V, 277/380/480/575V, 277/415/480/575V, 380/415/480/575V, 208/240/277/380/415V, 208/240/277/380/480V, 208/240/277/380/575V, 240/277/380/415/480V, 240/277/380/415/575V, 240/277/380/480/575V, 277/380/415/480/575V, 208/240/277/380/415/480V, 208/240/277/380/480/575V, 240/277/380/415/480/575V, 208/240/277/380/415/480/575V	120V	✓	✓
	15VA				
	20VA				
	25VA				
	30VA				
	40VA				
	50VA				
	60VA				
	75VA				
	96VA				

Recognized U.S. and Canada Conformite Europe

General Purpose Transformer

http://basicelectric.en.alibaba.com

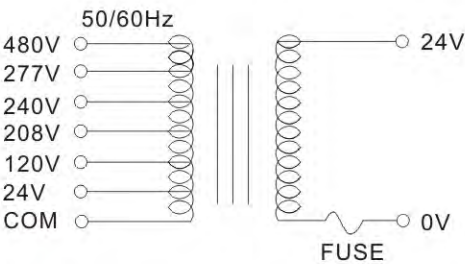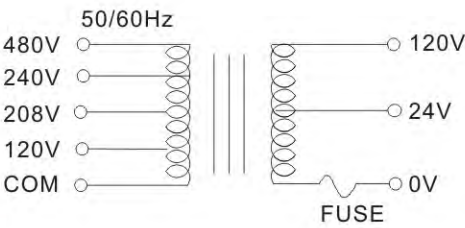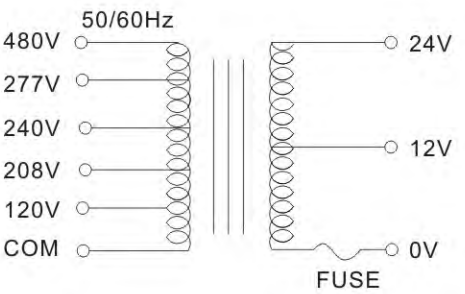

Main Features



- 50/60Hz
- 130(B) insulation system
- Foot Mount or Hub Mount
- UL506, General Purpose Transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC	UL LISTED	CE
DH/SH Model	20VA	24V, 120V, 208V, 240V, 480V,	24V 12/24V 24/120V	✓	✓
	85VA	120/208V, 120/240V, 120/480V,			
	96VA	208/240V, 208/480V, 240/480V,			
	150VA	120/208/240V, 120/208/480V,			
	175VA	120/240/480V, 208/240/480V,			
	240VA	120/208/240V, 120/208/480V,			
	300VA	120/240/480V, 208/240/480V,			
	375VA	120/208/240/480V			
UL LISTED UL Listed for the US and Canada CE Conformite Europe					

General Purpose Transformer

http://basicelectric.en.alibaba.com

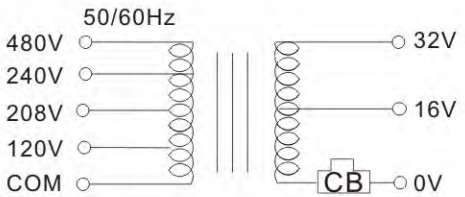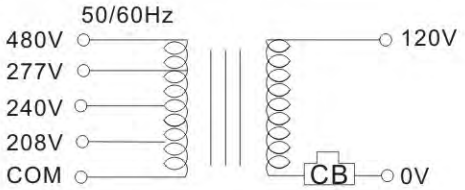

Main Features



- 50/60Hz
- 130(B) insulation system
- Foot Mount or Hub Mount
- UL506, General Purpose Transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC	UL LISTED	CE
DHCB Model	40VA 100VA 150VA	120V, 208V, 240V, 277V, 480V,	16V 32V 16/32V 120V 240V 120/240V	✓	✓
		120/240V, 208/240V, 208/277V, 208/480V,			
		240/277V, 240/480V, 277/480V,			
		208/240/277V, 208/240/480V,			
		208/277/480V, 240/277/480V,			
		208/240/277/480V			
UL LISTED UL Listed for the US and Canada CE Conformite Europe					

General Purpose Transformer

http://basicelectric.en.alibaba.com

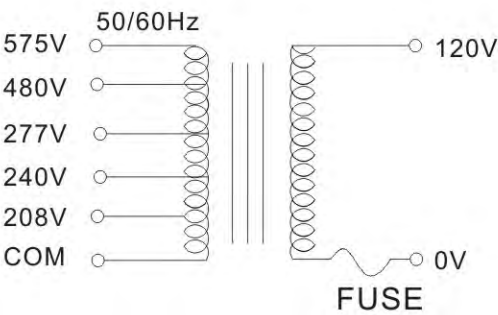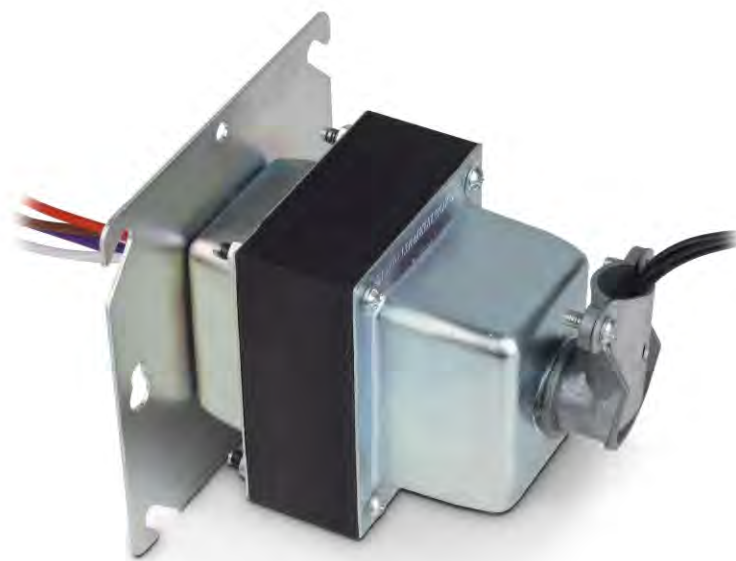

Main Features



- 50/60Hz
- 130(B) insulation system
- Plate Mount
- UL506, General Purpose Transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC		CE
G Model	50VA 96VA	208V, 240V, 277V, 480V, 575V,	120V	√	√
		208/240V, 208/277V, 208/480V, 208/575V, 240/277V, 240/480V, 240/575V, 277/480V, 277/575V, 480/575V,			
		208/240/277V, 208/240/480V, 208/240/575V, 208/277/480V, 208/277/575V, 208/480/575V, 240/277/480V, 240/277/575V, 240/480/575V, 277/480/575V,			
		240/277/480/575V, 208/240/277/480V, 208/240/277/575V, 208/240/480/575V, 208/277/480/575V,			
		208/240/277/480/575V			
 UL Listed for the US and Canada  Conformance Européenne					

General Purpose Transformer

http://basicelectric.en.alibaba.com

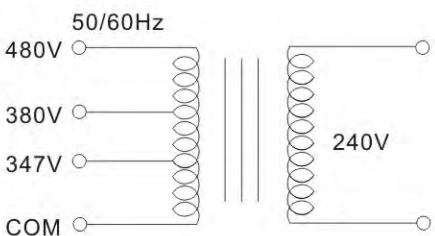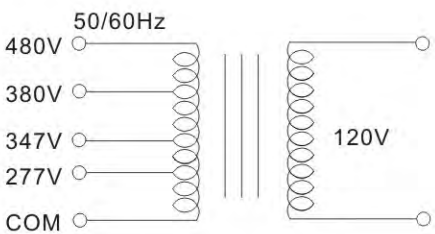

Main Features


- 50/60Hz
- AC to AC Only
- 130(B) insulation system
- Foot Mount
- UL Recognized
- UL506 General Purpose Transformer

Main Electric Parameters

Type	VA Rating	PRI	SEC					
L Model	40VA	277V, 347V, 380V, 480V,	120V 240V	√	√			
	50VA							
	60VA							
	75VA							
	100VA							
	130VA	277/347V, 277/380V, 277/480V, 347/380V, 347/480V, 380/480V,						
	150VA							
	175VA							
	200VA	277/347/380V, 277/380/480V, 347/380/480V,						
	250VA							
	300VA							
	350VA	277/347/380/480V						
	375VA							
	400VA							
	500VA							
 Recognized U.S. and Canada  Conformance Européenne								

Auto Transformer

http://basicelectric.en.alibaba.com

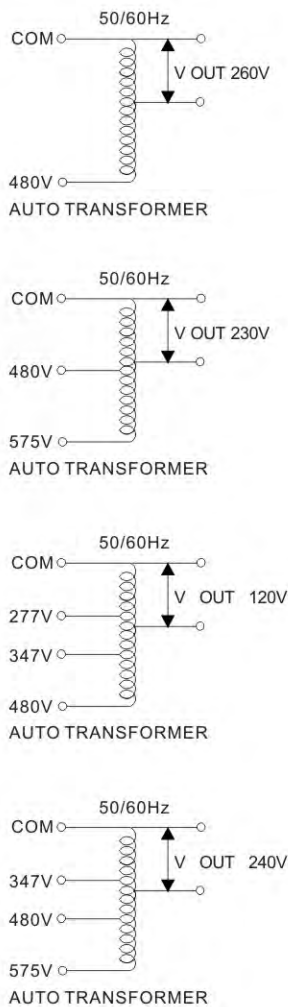

Main Features



- Auto transformer -4°C to 40°C case temperature rating is ideal for temperature ambients.
- Auto transformer at any input voltage 277 to 575V 50/60Hz.
- UL Recognized and CE Certified.130(B) insulation system

Main Electric Parameters

Type	VA Rating	PRI	SEC					
A Model	40VA	277V, 347V, 480V, 575V	120V 230V 240V 260V	✓	✓			
	50VA							
	60VA							
	75VA							
	100VA							
	130VA	277/347V, 277/480V, 347/480V, 347/575V, 480/575V						
	150VA							
	175VA							
	200VA	277/347/480V, 347/480/575V						
	250VA							
	300VA							
	350VA							
400VA								
500VA								
 Recognized U.S. and Canada  Conformance Europe								

Industrial Control Transformer

http://basicelectric.en.alibaba.com

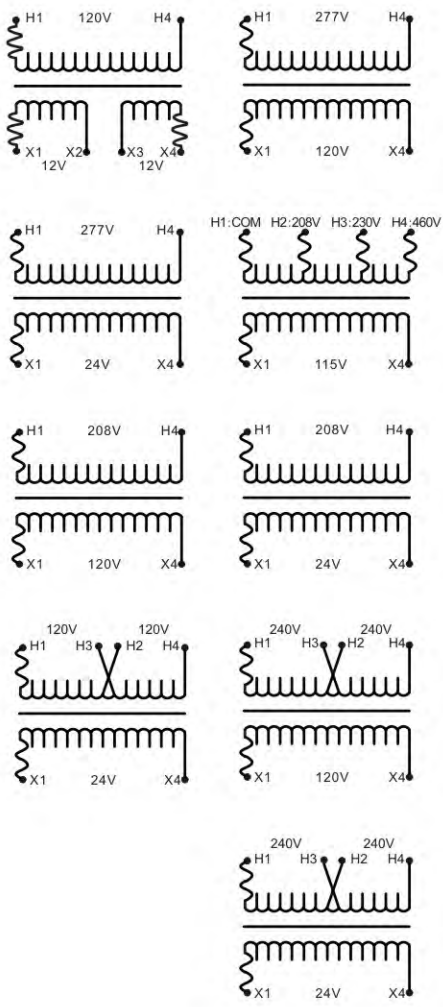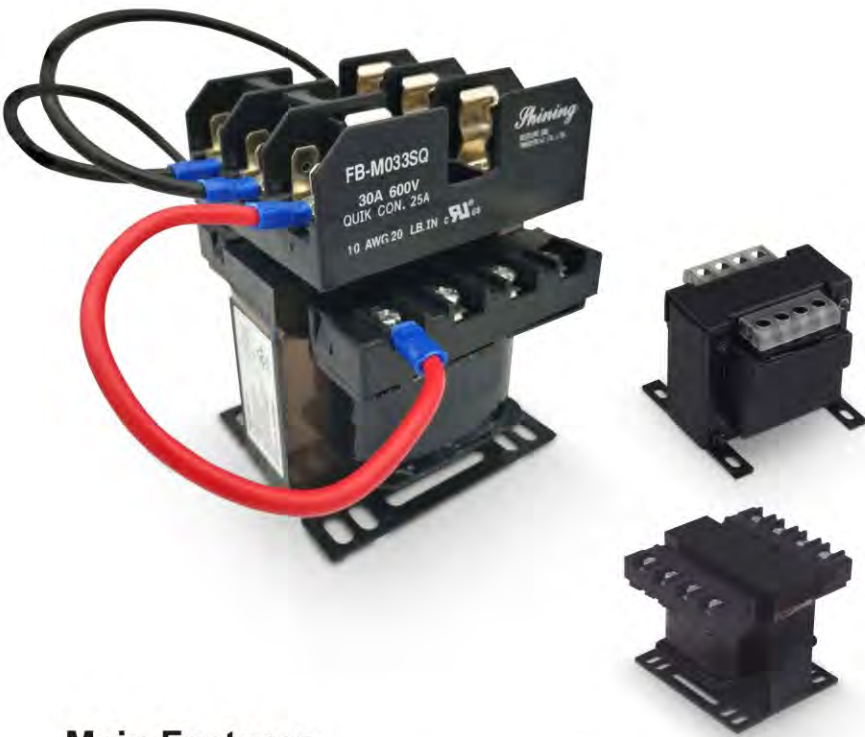

Main Features


- Precise spacing between interleaved windings for maximized voltage regulation
- Oversized copper windings contribute to low temperature rise
- Mounting plate adapts to various mounting dimensions
- Molded terminal blocks allow easy ring terminal installation
- Optional Secondary Fuse Kits available

Main Electric Parameters

International Series Industrial Transformers: 50~750VA Series Specifications	
VA Rating	50VA, 75VA, 100VA, 150VA, 200VA, 250VA, 300VA, 350VA, 500VA, 750VA
Frequency	50/60 Hz
Insulation Class	130(B) Insulation System
Operating Temperature	-131°F(55°C)
Primary Voltage(VAC)	120Vac, 208Vac, 240Vac, 277Vac, 480Vac, 120/240Vac, 240/480Vac, 208/230/460Vac
Secondary Voltage(VAC)	12/24VAC, 24VAC, 115VAC, 120VAC
Terminals	10-32
Mounting	Slotted Feet
Approvals	UL506, UL5085-1 & 2 Listed, UL, CE, RoHS

Fan Control Center

http://basicelectric.en.alibaba.com

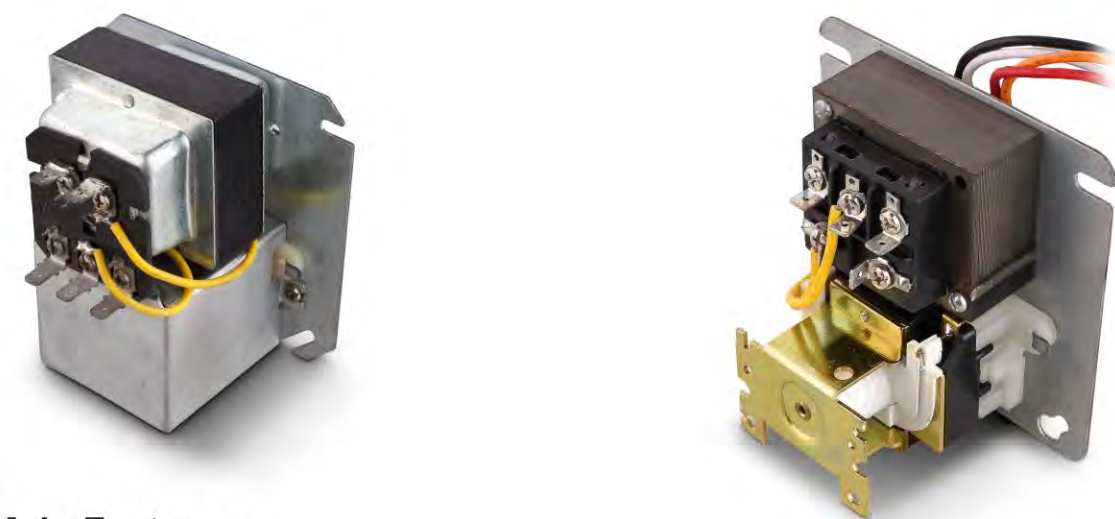

Main Features

- Transformer: 40VA, 50VA, 120VAC, 208/240VAC, 120/208/240VAC, 24VAC secondary.
- Low Voltage Terminal Board Provides low voltage control of line voltage fan motors and auxiliary
- Circuits in heating, cooling or heating-cooling circuits. They combine transformer and relay in one product that mounts directly to any 4 x4" junction box. Each includes plug-in relays, except MFC series has enclosed relay.

Main Electric Parameters

Relay Type	Primary		Secondary		UL mark
	Voltage	Connections	Voltage	Connections	
SPDT SPNO SPNC SPNO/SPNC DPNO DPNC DPDT	120V	Leads	24V	Terminal Board	✓
	120V	Leads	24V	Terminal Board	✓
	120V	Leads	24V	Terminal Board	✓
	120V	Leads	24V	Terminal Board	✓
	120V	Leads	24V	Terminal Board	✓
	120V	Leads	24V	Terminal Board	✓
	208/240	Leads	24V	Terminal Board	✓
	208/240	Leads	24V	Terminal Board	✓
	208/240	Leads	24V	Terminal Board	✓
	208/240	Leads	24V	Terminal Board	✓
	208/240	Leads	24V	Terminal Board	✓
	208/240	Leads	24V	Terminal Board	✓
	120/208/240	Leads	24V	Terminal Board	✓
	120/208/240	Leads	24V	Terminal Board	✓
	120/208/240	Leads	24V	Terminal Board	✓
	120/208/240	Leads	24V	Terminal Board	✓
	120/208/240	Leads	24V	Terminal Board	✓
	120/208/240	Leads	24V	Terminal Board	✓
Recognized U.S. and Canada Conformite Europe					

EC Motor

http://basicelectric.en.alibaba.com

Main Features

- Electronically commutated motor
- Drop in replacements for Unit bearing motor and Square AC Motors
- Moisture protection: IP65
- Totally enclosed, air over
- Rotation determined viewing the shaft end
- Automatic overload
- Up to 70% efficient
- Efficiencies up to 3 times higher than shaded pole motors and 40% higher than PSC



Main Electric Parameters

Model	H.P (W)	Voltage (V)	Frequency (Hz)	AMPS (A)	Speed (RPMS)
EC80xx-1-series	4W - 20W	100-240	50/60	0.05~0.4	1550
EC80xx-1-series	25W	110-127	50/60	0.3~0.4	1550
EC80xx-1-series	25W	220-240	50/60	0.2~0.25	1550
EC80xx-1-series	34W	110-127	50/60	0.4~0.5	1550
EC80xx-1-series	34W	220-240	50/60	0.25-0.3	1550
Recognized U.S. and Canada Conformite Europe					

EC Motor

http://basicelectric.en.alibaba.com

Main Features

- Electronically commutated motor
- Drop in replacements for Unit bearing motor and Square AC Motors
- Moisture protection: IP65
- Totally enclosed, air over
- Rotation determined viewing the shaft end
- Automatic overload
- Up to 70% efficient

EC motor mainly used in refrigerator, refrigerated showcase, kitchen refrigerated cabinet, ice machine and supermarket cold-chain.



Main Electric Parameters

Model	H.P (W)	Voltage (V)	Frequency (Hz)	AMPS (A)	Speed (RPMS)
EC80xx-series	4W - 20W	100-240	50/60	0.05~0.4	1550
EC80xx-series	25W	115	50/60	0.35	1550
EC80xx-series	25W	230	50/60	0.2	1550
EC80xx-series	35W	115	50/60	0.5	1550
EC80xx-series	35W	230	50/60	0.3	1550
EC80xx-series	50W	115	50/60	0.6	1550
EC80xx-series	50W	230	50/60	0.4	1550
UL Recognized U.S. and Canada CE Conformite Europe					

EC Motor

http://basicelectric.en.alibaba.com

Main Features

- Electronically commutated motor
- Drop in replacements for Unit bearing motor and Square AC Motors
- Moisture protection: IP65
- Totally enclosed, air over
- Rotation determined viewing the shaft end
- Automatic overload
- Up to 70% efficient



Main Electric Parameters


Model	H.P (W)	RPM	Volts	Amps	Rotation
EC82xx- series	6W - 20W	1550	110-240	0.1 - 0.25	CW or CCW
EC82xx- series	25W	1550	110-120 or	0.3	CW or CCW
EC82xx- series	25W	1550	208-240	0.2	CW or CCW
EC82xx- series	30W	1550	110-120	0.35	CW or CCW
EC82xx- series	30W	1550	208-240	0.25	CW or CCW
EC82xx- series	35W	1550	110-120	0.4	CW or CCW
EC82xx- series	35W	1550	208-240	0.3	CW or CCW
EC82xx- series	40W	1550	110-120	0.45	CW or CCW
EC82xx- series	40W	1550	208-240	0.35	CW or CCW
EC82xx- series	45W	1550	110-120	0.5	CW or CCW
EC82xx- series	45W	1550	208-240	0.4	CW or CCW
EC82xx- series	50W	1550	110-120	0.55	CW or CCW
EC82xx- series	50W	1550	208-240	0.45	CW or CCW
EC82xx- series	55W	1550	110-120	0.65	CW or CCW
EC82xx- series	55W	1550	208-240	0.5	CW or CCW
EC82xx- series	60W	1550	110-120	0.8	CW or CCW
EC82xx- series	60W	1550	208-240	0.55	CW or CCW
EC82xx- series	75W	1550	110-120	0.9	CW or CCW
EC82xx- series	75W	1550	208-240	0.6	CW or CCW
UL Recognized U.S. and Canada CE Conformite Europe					

C-Frame Motor

http://basicelectric.en.alibaba.com

Main Features

- Applications: Evaporators / Range Hoods / Ventilators Exhaust Fans / Refrigerators / Unit Heaters
- Shaded pole
- Thickness Of Stack: 3/8"~ 1 1/2"
- Voltage: 120~240V
- Thermally Protected
- Insulation: Class B

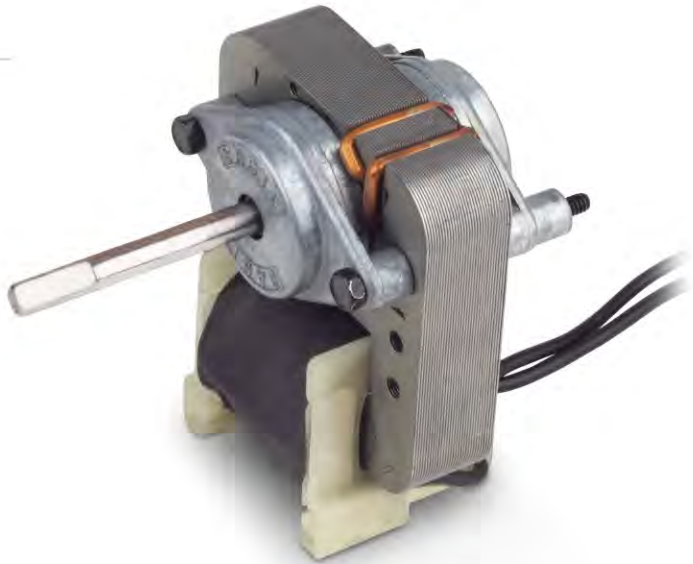

Main Electric Parameters

Model	Stack	RPM	Speeds	Volts	Rot.	Shaft	
YJF 6138	20	3500	115V/60Hz		CW/CCW	Φ8X131.5	
YJF61(A)-(B) Series	3/8"	3000	One	120	CW/CCW	3/16" x 1-1/2"	✓
	3/8"	3000	One	240	CW/CCW	3/16" x 1-1/2"	
	3/8"	3000	One	120/240	CW/CCW	3/16" x 1-1/2"	
	1/2"	3000	One	120	CW/CCW	3/16" x 1-1/2"	
	1/2"	3000	One	240	CW/CCW	3/16" x 1-1/2"	
	1/2"	3000	One	120/240	CW/CCW	3/16" x 1-1/2"	
	5/8"	3000	One	120	CW/CCW	3/16" x 1-1/4"	
	5/8"	3000	One	240	CW/CCW	3/16" x 1-1/4"	
	5/8"	3000	One	120/240	CW/CCW	3/16" x 1-1/4"	
	3/4"	3000	One	120	CW/CCW	7/32" x1-1/4"	
	3/4"	3000	One	240	CW/CCW	7/32" x1-1/4"	
	3/4"	3000	One	120/240	CW/CCW	7/32" x1-1/4"	
	7/8"	3000	Two	120	CW/CCW	7/32" x1-7/16"	
	7/8"	3000	Two	240	CW/CCW	7/32" x1-7/16"	
	7/8"	3000	Two	120/240	CW/CCW	7/32" x1-7/16"	
	1"	3000	One	120	CW/CCW	3/16" x 2-3/8"	
	1"	3000	One	240	CW/CCW	3/16" x 2-3/8"	
	1"	3000	One	120/240	CW/CCW	3/16" x 2-3/8"	
	1-1/16"	3000	One	120	CW/CCW	3/16" x 1-1/2"	
	1-1/16"	3000	One	240	CW/CCW	3/16" x 1-1/2"	
	1-1/16"	3000	One	120/240	CW/CCW	3/16" x 1-1/2"	
	1-1/8"	3000	One	120	CW/CCW	3/16" x 1-1/2"	
	1-1/8"	3000	One	240	CW/CCW	3/16" x 1-1/2"	
	1-1/8"	3000	One	120/240	CW/CCW	3/16" x 1-1/2"	
	1-1/2"	3000	One	120	CW/CCW	7/32" x1-1/4"	
	1-1/2"	3000	One	240	CW/CCW	7/32" x1-1/4"	
	1-1/2"	3000	One	120/240	CW/CCW	7/32" x1-1/4"	
A: May be 38, 12, 58, 34, 78, 110, 1116, 118 or 112.				B: May be 1(120V), 2(240V) or 3(120/240).			
 Recognized U.S. and Canada							

Square Shaded-Pole Motor

http://basicelectric.en.alibaba.com

Main Features

- Applications: Commercial Refrigeration Display Cases Unit Heaters / Evaporator / Condensing Unit, Ice Machine
- Aluminum Housing
- Manner Of Working: S1
- Level Of Protection: IP42
- Single phase, 4 shaded poles.
- Environment Temperature: -30℃ to+50℃
- Insulation Class: B



Main Electric Parameters

Model	Voltage (V)	Frequency (Hz)	Rated Input (W)	Output (W)	Rated Speed (r/min)	Air Volume (M3/h)	Fan Blade (mm)	License
YJF5-13	110-127	50/60	28	5	1300	205	Φ 7.87"	CE CCC
	220-240	50/60	28	5	1300	205	Φ 7.87"	CE CCC
YJF7-20	110-127	50/60	31	7	1300	640	Φ 9.05"	CE CCC
	220-240	50/60	31	7	1300	640	Φ 9.05"	CE CCC
YJF10-20	110-127	50/60	36	10	1500	800	Φ 9.05"	CE CCC
	220-240	50/60	36	10	1500	800	Φ 9.05"	CE CCC
YJF10-20	110-127	50/60	53	10	1500	205	Φ 9.05"	CE CCC
	220-240	50/60	53	10	1500	205	Φ 9.05"	CE CCC
YJF16-25	110-127	50/60	60	16	1550	760	Φ 10"	CE CCC
	220-240	50/60	60	16	1550	760	Φ 10"	CE CCC
YJF25-40	110-127	50/60	100	25	1450	1030	Φ 11.8"	CE CCC
	220-240	50/60	100	25	1450	1030	Φ 11.8"	CE CCC
YJF34-45	110-127	50/60	110	34	1450	1210	Φ 11.8"	CE CCC
	220-240	50/60	110	34	1450	1210	Φ 11.8"	CE CCC